




Product Specifications

Model No: CS-M004

Drawing (Unit mm)

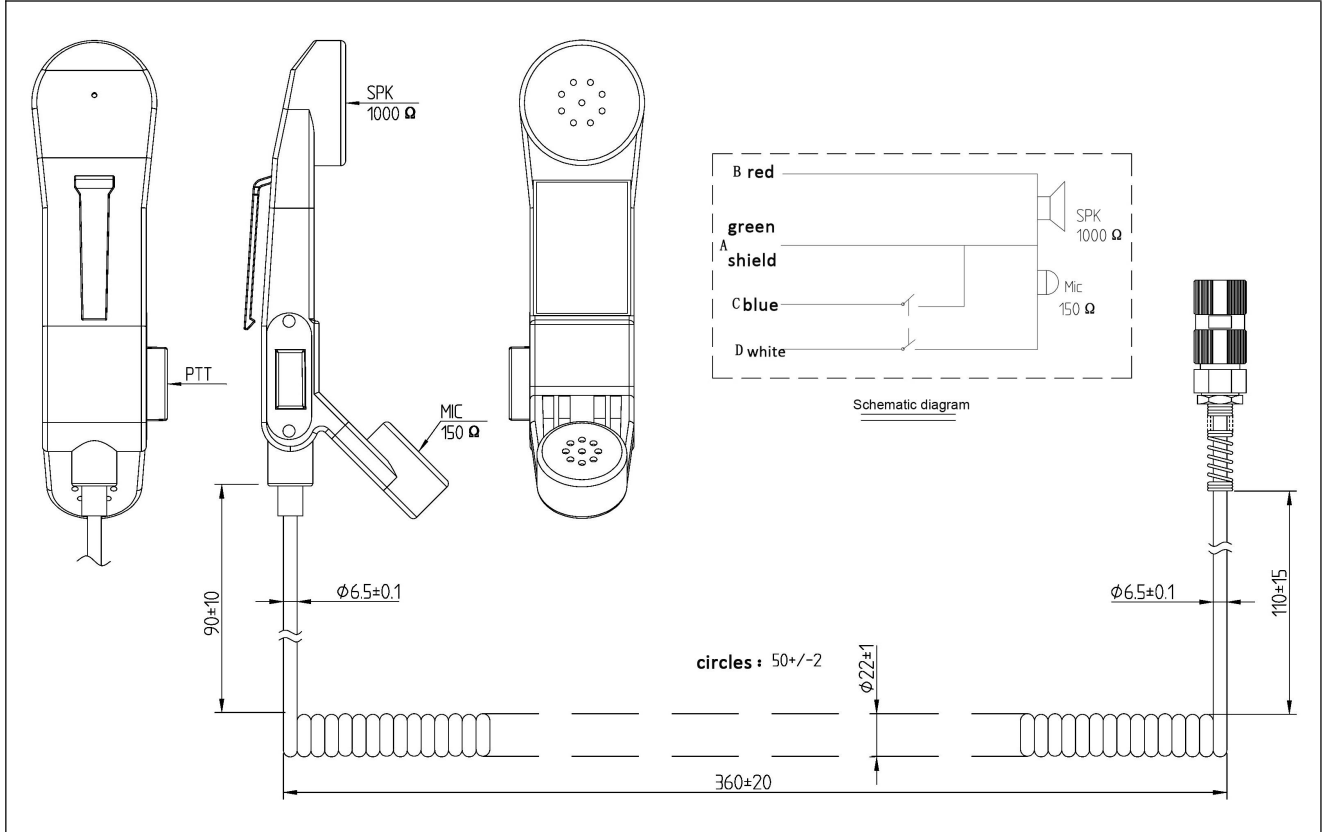

2. Picture



3. Speaker Specification

Type	Transducer Moving coil dynamic speaker
Impedance	1000Ω±15% @1KHZ
Sensitivity	109dB±4dB at 1K at 1mw
Frequency respond	300-4KHZ
Rated input power	0.5W
Maximum input power	1W

4. Microphone Specification

Type	Transducer Moving coil dynamic MIC
Sensitivity Range	-65± 4dB @1KHZ
Impedance Max	150Ω ±10%at 1kHz
Frequency	300-3KHz

5.Environmental Conditions

Operating Temperature	-30°C~75°C
Relative Humidity	<96%